




Search dmpalarms



Z-Wave® Compatible

## One panel offers everything you want —

Two-way Wireless Receiver, along with Network, Dialer, and Add-On Cellular Communications

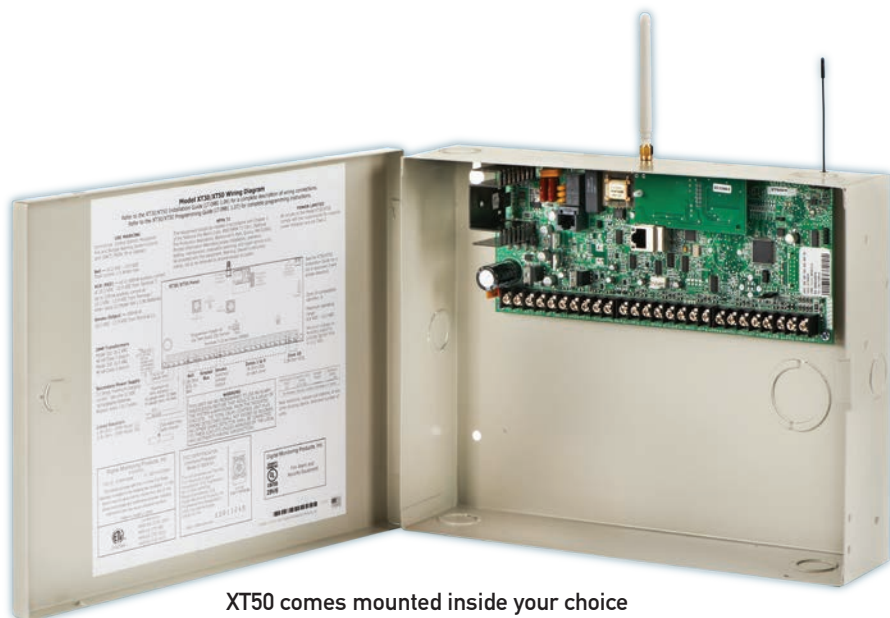

XT50 comes mounted inside your choice of a small or medium gray enclosure

This extremely powerful panel is highly customizable, giving you the flexibility to tailor the panel in a configuration that meets the needs of both you and your customer. You get many of the features and technology expected in a larger panel with all of the quality and innovation you expect from DMP.

- Choose your preferred configuration for on-board communications: Network and/or Dialer
- On-Board Wireless Receiver (XT50)
- Add technology later to expand capabilities, including wireless or cellular (CDMA or HSPA+)
- XT30 supports 10 hard-wired on-board zones and 28 expansion zones — wireless (with 1100D Series) or hard-wired
- XT50 supports 10 hard-wired on-board zones, and up to 28 hard-wired zones. Up to 28 wireless expansion zones when using an external 1100 Series receiver. 48 wireless expansion zones when using the on-board wireless receiver.

## XT SERIES™ — BURGLARY/FIRE/DOOR ACCESS CONTROL PANELS

### SYSTEM FEATURES

- DMP Network and Cellular Communications
- MyAccess™ - Remote control via SMS messaging
- Virtual Keypad™ App - Compatible with Apple® and Android® smartphones and tablets.
- ePAD™ - Control your system from any computer or mobile browser
- Late to Open/Early to Close and Traffic Count features for retail installations
- Door Control feature can be added with the 734 Wiegand module or DMP Thinline™, Aqualite™, or 7800 Series Graphic keypads with built-in proximity reader and relay. Codeless arming/disarming with proximity reader
- Eight keypad addresses
- 30 (XT30) / 99 (XT50) 4-digit user codes with authority levels
- All/Perimeter, Home/Sleep/Away or six Area System
- One two-wire smoke detector zone
- Arm only, ambush code, and temporary user code options
- Four on-board and eight wireless outputs for annunciation and control applications
- 16-character zone, user, and area names
- 100-event (XT30) or 200-event (XT50) memory
- Backward and forward compatibility with a variety of DMP products
- 500mA auxiliary output
- 100mA switched smoke detector
- Built-in English text programming from any LCD (liquid crystal display) keypad
- Open/Close schedules with Closing Check
- Attrition Detection™ monitors system for arming activity
- User Checkin allows you to monitor latchkey children
- Remote program/download with Remote Link™
- Programmable User Inactivity Monitor watches for on-site activity



## RECEIVER 1 & 2 OPERATION

Select one or two receivers via Network, Cellular or Dialer for messages regarding Alarms, Supervisory/Trouble, Opening/Closing, and Test Reports. Send all messages to both receivers, or identify one receiver for alarms and second for trouble messages to alert only the proper responder.

## FLEXIBILITY WHEN ORDERING

Factory-configurable options give you the freedom to order the panels to match your system and customer requirements with dialer and network connection options directly on-board. Knowing in advance what options you require saves time and money, helping make this the most affordable all-in-one security control panel available!

The XT Series™ also offers the freedom to add on a cellular module or connect a wireless receiver and devices to the panel at a later date.

## COMMUNICATION FLEXIBILITY IN PROGRAMMING

As the industry's first all-in-one control panel, the XT Series enables you to program up to three different communication paths, including digital dialer, on-board 10/100 Ethernet, or cellular communication to a SCS-1R or SCS-VR Receiver. This provides one primary path and up to two backup communication paths, using the same proven technology that secures countless banks and other high-security applications.

For added flexibility, the Receiver 1 & 2 Operation feature allows specific messages to be transmitted to one of two receivers, or both.

## MOBILE PLATFORMS

**MyAccess™** - The DMP MyAccess lets customers send many of the most common system commands to their residential or commercial systems via text messages. They can also choose to have alerts sent to them each time there's an arm/disarm, an alarm, or other selected events. Alerts can be transmitted by the panel as text messages to up to three phones.

End users can issue the following commands via MyAccess:

- **Help:** Get a list of available text commands.
- **Arm / Disarm**
- **Home / Sleep / Away:** Arm a residential panel using one of three armed statuses.
- **Momentary:** Text "mom", then a space and an output number.
- **On / Off:** Type the command "ON" or "OFF", then a space, then the output name or number to activate the output.
- **Status:** Get a status report from the panel.

### Z-Wave Commands


- **Status locks:** Lists the locks that are unlocked.
- **Status thermostats:** Lists the status of all thermostats.

**Virtual Keypad™ App** - Dealers can invite their customers to begin using this App on their iPhone, iPad, or Android Device to give them control of their security system. The Virtual Keypad allows them to arm or disarm, and to check the status of their cellular connected DMP security system from anywhere they have cell or Internet service. Additional features include home control with Z-Wave devices.

**ePAD™ 5.0** - The ePAD Mobile Keypad enables users to control and monitor their security systems from any computer or mobile browser. This technology delivers the full function and feel of a traditional keypad connected to any DMP panel.

## CELLULAR ADD-ON

Want to add Cellular later? Simply install the 263C or 263H Digital Cellular Communicator plug-on expansion card. There is no additional enclosure, power supply, battery, cabling, or conduit required.



## ON-BOARD WIRELESS



The XT50 Control Panel offers an 1100 Series Wireless Receiver on-board, supporting 1100 Series Wireless devices. The 900MHz frequency-hopping spread-spectrum 1100 Series wireless features two-way communication for superior operation, supervision, and battery life. Two-way communication minimizes repetitive signaling and helps to quickly identify missing transmitters. Simple keypad access can be used to verify that wireless device zones are in working order.

## 1100 SERIES WIRELESS ADD-ON

Add any 1100D Series Wireless Receiver for up to 28 wireless zones on the XT30 and XT50, or up to 48 wireless zones with the on-board receiver on the XT50.

## 9000 SERIES WIRELESS KEYPAD

The 9060 and 9063 Wireless Keypads are fully functioning, supervised keypads that provide installation flexibility. These full-feature keypads include four 2-button panic keys and an internal speaker. The backlit keypad is easy to read, and both the keypad and logo turn Red in alarm conditions, providing a visual alert. Both keypads have a 32-character display, and can be programmed with a 16-character home or business name. The 9063 keypad also includes a built-in proximity reader for codeless arming and disarming.



## COMPATIBILITY


Like all DMP products, the XT Series was designed to provide extensive backward and forward compatibility with DMP wired and wireless keypads, expansion modules, and software including Remote Link and System Link.

## SIMPLE ARMING

XT Series panels provide multiple arming configurations: Area arming with six separate areas; All/Perimeter arming with perimeter and interior areas; or Home/Sleep/Away arming with perimeter, interior, and bedroom areas. Users can arm the perimeter and interior at night while leaving the bedroom area disarmed.

## 7800 GRAPHIC KEYPAD

Provides Touchscreen control for all keypad functions. Slim profile in stylish gloss black or white finish with a 5 inch, full-color display.



7800 Graphic Keypad

## FALSE ALARM FEATURES

Providing end users with a way to reduce false alarms, both Cancel/Verify™ and the False Alarm Question features prompt end users to validate whether an alarm has occurred after entering their code. In a Home/Sleep/Away or All/Perimeter system, the user can either press VERIFY or YES to manually confirm a valid burglar alarm and an alarm is then sent to the Central Station.

## KEYPAD SHORTCUT KEYS

Keypad shortcut keys are provided to simplify operation and allow the user to more quickly arm, check in, monitor, exit, or reset the system. One-button arming creates the simplest keypad available. Use the one-button shortcut keys for common functions.

## USER CHECKIN

With User Checkin you can easily monitor latchkey children and know that they are safe at home, checked in by receiving an email/SMS message to your computer, PDA, or cell phone.

## USER CODES

Program up to 30 user codes with the XT30, and 99 codes with the XT50 Series panels. Assign a Standard or Master Authority level to control each user's level of access to the system. Additionally, the XT50 provides scheduled and limited users.

## ATTRITION DETECTION™ PROMPTS YOU TO CALL YOUR CUSTOMER

The exclusive DMP Attrition Detection feature gives you advance warning that a customer may be preparing to cancel their monitoring contract. With this feature activated, you will receive a notification if there is no system activity for the number of days you select.

## CROSS ZONING

This powerful, false-alarm-reduction feature allows multiple zones to be cross-zoned and report alarms only when two or more zones fault within a programmable time of 4 to 250 seconds. Should just one zone trip, only a zone fault report is sent to the Central Station.

## EVENT MEMORY

The XT30 logs up to 100 and the XT50 logs up to 200 user and system events that you can view at any time through a keypad User Menu option. The Display Events feature allows users to view stored events such as openings and closings, zone events, user code changes, and supervisory events.

## BUILT-IN PROGRAMMER

An internal English-text programmer enables technicians to easily program and test the panel from any keypad. A lockout code restricts access to only authorized persons.



## PROGRAMMABLE OUTPUTS

Four open collector outputs can be used for a variety of remote control and annunciation applications. Each output is rated for 50mA maximum. Add the Model 860 Relay Output module to provide four Form C relay contacts.

## ZONE INACTIVITY

With Zone Inactivity, you can easily monitor a person living alone. If there is no activity at the premises within the programmed number of hours, the system transmits an email/SMS message to your computer, PDA, and/or cell phone. The Central Station also receives an alert. It's the perfect companion for customers looking after aging adults.

## ZONE AUDIT

The Zone Audit feature allows programming the panel to send an alert when the sensor fails to trip within the specified number of days. This feature helps identify potential sensor problems, including sensors deactivated to bypass faults.

## REMOTE PROGRAMMING

Remotely program panels using DMP Remote Link software. Upload panel programming, make the necessary programming change, and then download the revised programming into the panel.

## DOOR ACCESS FEATURE

Door Access can be added to any XT Series system by using a 734 Wiegand module or DMP keypad containing an on-board proximity reader and relay. These allow users to simply present their proximity credentials to the keypad to gain access to a protected area and provide system door control, arming, and disarming using proximity devices.

## FOR RETAIL INSTALLATIONS

Late to Open/Early to Close feature sends a message to the central station if the facility isn't opened on time or closed before the scheduled time. The Traffic Count sends a daily tally of trips for the specified zone.

With the Receiver 1 & 2 operation, Auxiliary 1 & 2 Zone messages can be sent to a specific receiver, enabling retail clients to alert a specific guard station of potential shoplifting in a certain area or other type of notifications.

# XT Series

## KEYPADS

7000	Series Thinline Keypads
7000A	Series Aqualite Keypads
7300	Series Icon Keypads
7760	Clear Touch Keypad
7800	Series Graphic Touchscreen Keypad
9060-W	Wireless Keypad
9063-W	Wireless Keypad with Prox Reader
ePAD™ 5.0	Mobile Keypad

## EXPANSION MODULES

708	Bus Extender
710	Bus Splitter/Repeater
711	Single Zone Expansion
712-8	8-zone Expansion
714	4-zone Class B Expansion
714-8	8-zone Class B Expansion
714-16	16-zone Class B Expansion
715	4-zone 2-wire smoke Expansion
715-8	8-zone 2-wire smoke Expansion
715-16	16-zone 2-wire smoke Expansion

## CELLULAR

263C	3G CDMA Cellular Communicator (Verizon)
263H	4G HSPA+ Cellular Communicator (AT&T, T-Mobile)
380-400	Replacement Level 400 SIM Card
381-12	12' SMA Coax Cable Extension
381-25	25' SMA Coax Cable Extension
383	Rubber Duck Antenna
387-1	3dB Fiberglass Antenna
387-2	2dB Attack Enclosure Antenna
387-3	3dB MEG Antenna

## SMOKE/HEAT DETECTORS

521B/BXT	Addressable Smoke. CleanMe
SLR-835	Photoelectric Smoke
SLR-835H	Photoelectric Smoke/Heat

## INTRUSION DETECTORS

Sentrol® Contacts and Sensors
Optex PIRs
Potter Contacts and Sensors
Tane Contacts and Water Sensors
Virtually any other Intrusion Detectors

## DOOR ACCESS

734	Wiegand Interface Module
OP-08CB	REX Motion Detector
PB-2	Request-to-Exit Button
	Proximity Readers and Credentials
	DMP ProxPatch

## CENTRAL STATION RECEIVERS

SCS-1R Security Control Receiver
SCS-105 Single-Line DMP Serial 3 Receiver
Compatible with Receivers that accept Standard CID. DMP Serial 3 or Network messaging.
SCS-VR (Virtual Receiver) Software only solution that runs on a server for network IP and cellular communications.

## COMPUTER SOFTWARE

Remote Link Programming Software
System Link End-User Management Software
Link Server Application

## DMP WIRELESS

1100D	Receiver
1100DI	In-line Receiver
1100DH	High Power Receiver
1100R	Repeater
1101	Universal Transmitter, Internal and External Contacts
1102	Universal Transmitter, External Contact
1103	Universal Transmitter, External Contact
1105	Universal Transmitter, Internal and External Contact



## DMP WIRELESS CONT.

1107	Micro Window Transmitter
1114	Four-Zone Expander
1116	Relay Output
1117	LED Annunciator
1119	Door Sounder
1121	Pet Immune PIR Motion Detector
1125	PIR Motion Detector
1126C	Ceiling Mount Curtain PIR
1126R	360 Ceiling Mount PIR
1127C	Wall Mount Curtain PIR
1127W	Wall Mount Wide Angle PIR
1129	Glassbreak Detector
1131	Recessed Contact
1135	Siren, 100dB
1135dB	Siren, 110dB
1139	Bill Trap
1142	Two-Button Hold-up Transmitter
1142BC	Two-Button Belt Clip Hold-up Transmitter
1145-4-B	Four-Button Key Fob
1145-2-B	Two-Button Key Fob
1145-1-B	One-Button Key Fob
1161	Residential Smoke Detector
1162	Residential Smoke/Heat Detector
1183-135F	Heat Detector
1183-135R	Heat Detector
1184	Carbon Monoxide Detector


## OTHER WIRELESS

738A	Ademco 32-point Expansion Module
738I	ITI 96-point Expansion Module
738Z	Z-Wave Interface Module

## ACCESSORIES

300	Four-wire Harness
307	Clip-On Tamper Switch
307-S	Screw-On Tamper Switch
335	Intrusion Siren
370	Lightning Suppressor
399	Programming Harness
861	Power Distribution Module

## ORDERING INFORMATION

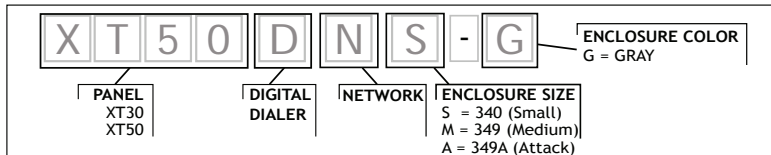

## SYSTEM SPECIFICATIONS

Primary Power	16.5 VAC. 40 VA transformer (Model 321)
Secondary Power	12 VDC Battery
Outputs	
Auxiliary	500mA at 12 VDC
Alarm	1.5 Amps at 12 VDC
Smoke	100mA at 12 VDC
Annunciator (4)	50mA each (switched ground)
Enclosures:	
Material	Cold-rolled steel
Model 340 (Gray)	12.5" W x 9.5" H x 2.75" D
Model 349 (Gray)	12.25" W x 11.75" H x 3.125" D
Model 349A (Gray Attack)	13.25" W x 11.3" H x 3.6" D

## LISTINGS AND APPROVALS

California State Fire Marshal (CSFM)	
ETL:	ANSI/SIA CP-01-2010 False Alarm Reduction
	ANSI/UL 1023 Household Burglar
	ANSI/UL 985 Household Fire Warning
	ANSI/UL 1635 Digital Burglar
	ANSI/UL 1610 Central Station Burglar
FCC Part 15 ID:	CCKPC0096
FCC Part 68 Registration ID	CCKAL00BXT50
Industry Canada ID:	5251A-PC0096
Underwriters Laboratories (UL) Listed	
	ANSI/UL 1023 Household Burglar
	ANSI/UL 985 Household Fire Warning
	ANSI/UL 1635 Digital Burglar
	ANSI/UL 1610 Central Station Burglar

Refer to the XT Series Installation Guide, Programming Guide and specific compliance listings for installation and programming requirements necessary to meet a particular approval.

For additional information, access [www.dmp.com](http://www.dmp.com) and select Compliance.

