


MAGNER®

Perfecting the art and science of coin counting and sorting.

Designed for ease of use and reliable performance, our Pelican 305 Coin Sorter with alloy sensor technology, processes mixed coins at speeds up to 700 coins per minute with outstanding accuracy. The Pelican can also off-sort unwanted coins or objects from the coin mix. In a desktop or full bagging configuration with exact bag stops, the Pelican 305 offers real value and a low cost of ownership for all mid-range sorting applications.

Pelican 305

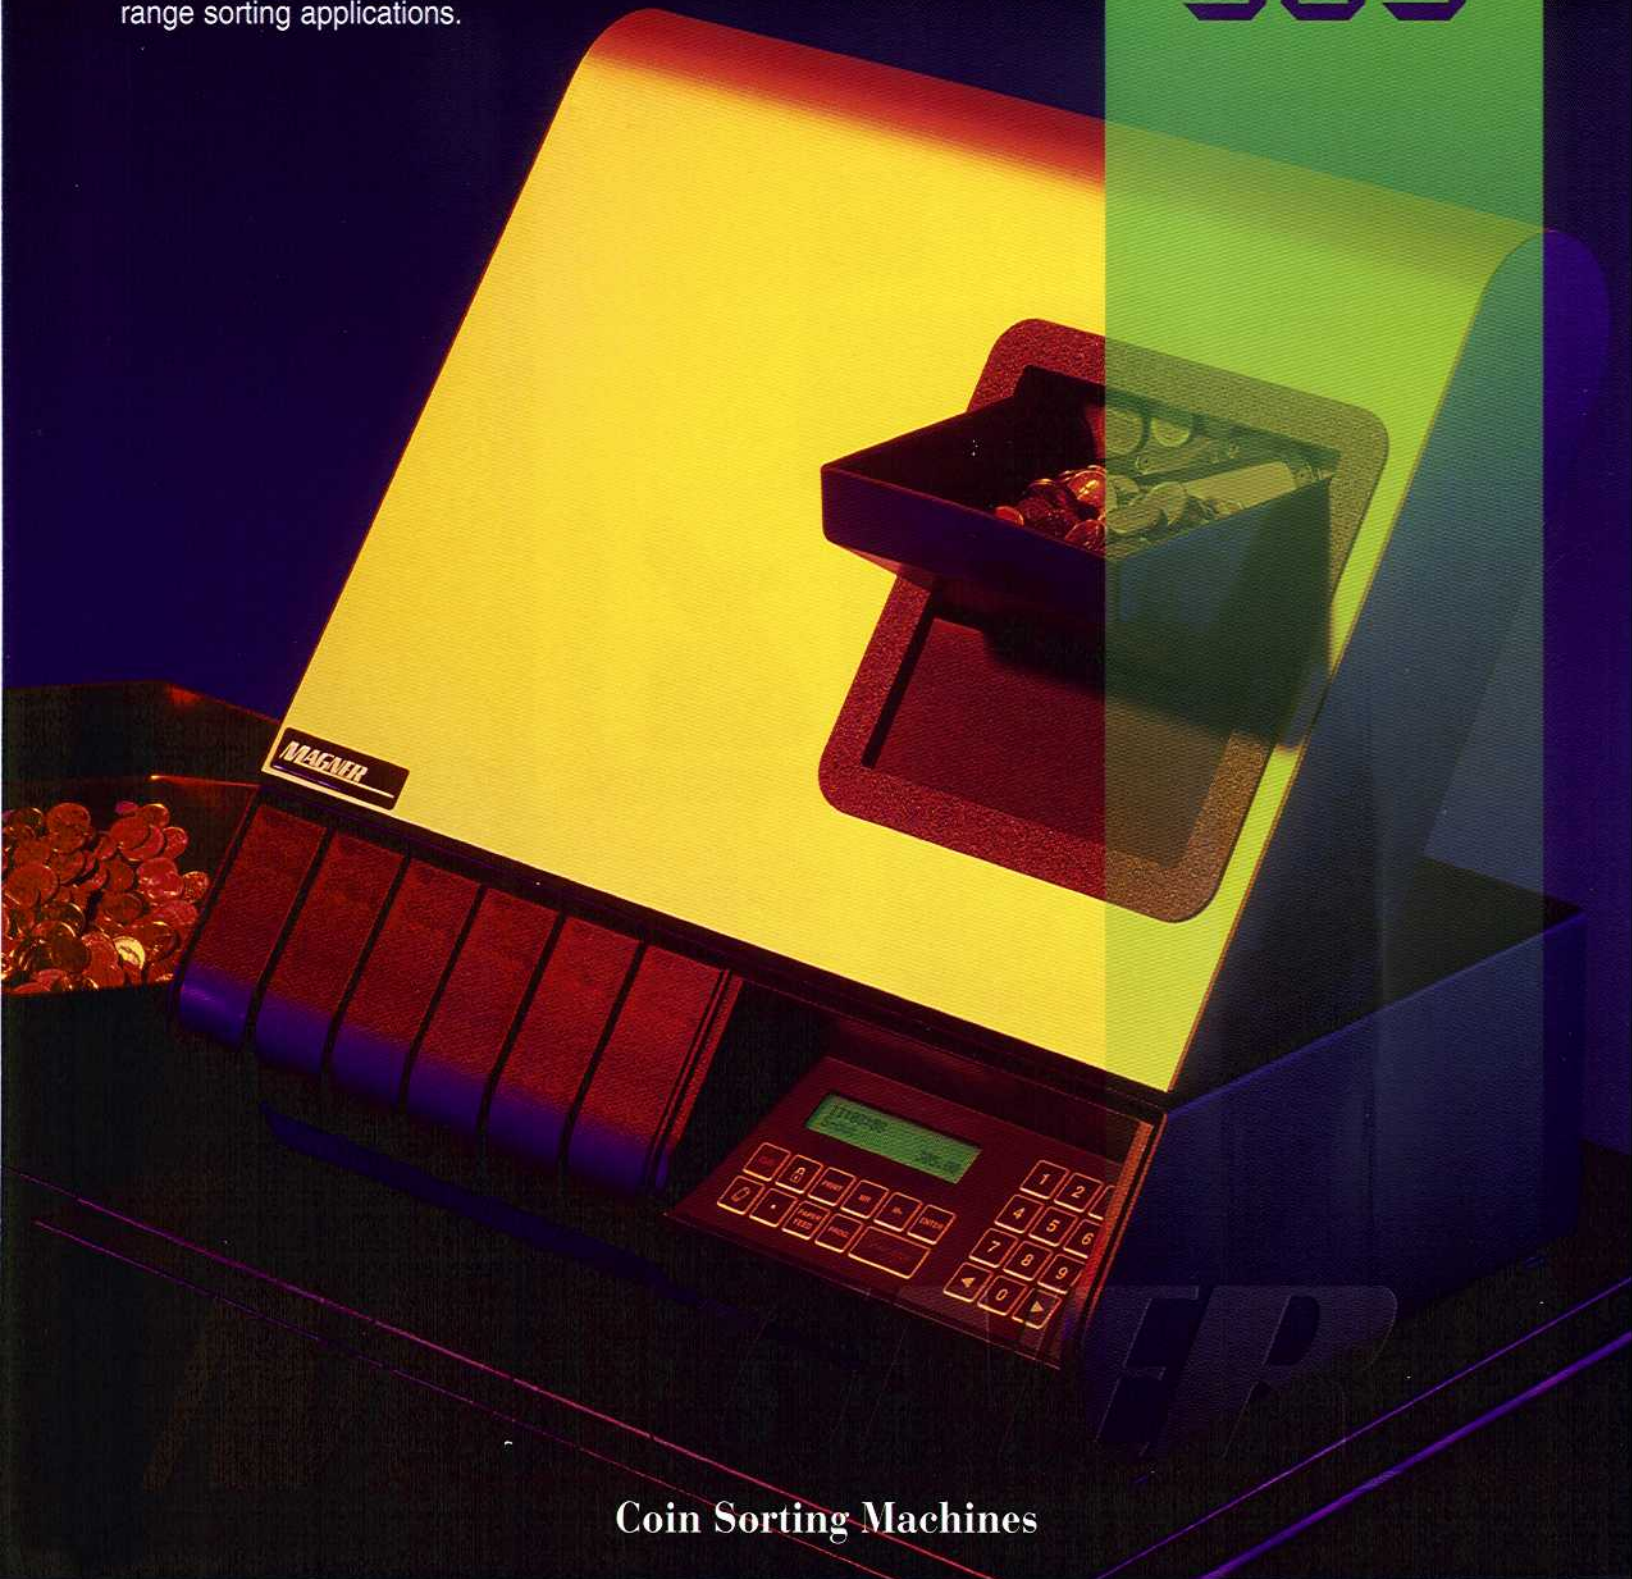


Coin Sorting Machines

MAGNER® Pelican 305

The Pelican 305 Coin Sorter was developed for mixed coin applications that demand high-levels of accuracy and reliability. The unit counts and sorts the 6 U.S. coin denominations at speeds up to 700 coins per minute, and it offers a built-in alloy sensor that allows the automatic off-sorting of foreign and damaged coins, tokens and slugs. Bag stops are exact and programmable. Configurations as a countertop sorter with coin drawers or with a stand to facilitate the bagging of coins are available.

Worldwide support for all MAGNER® products is available through our Technical Support Team (TST) and network of Authorized Distributors.

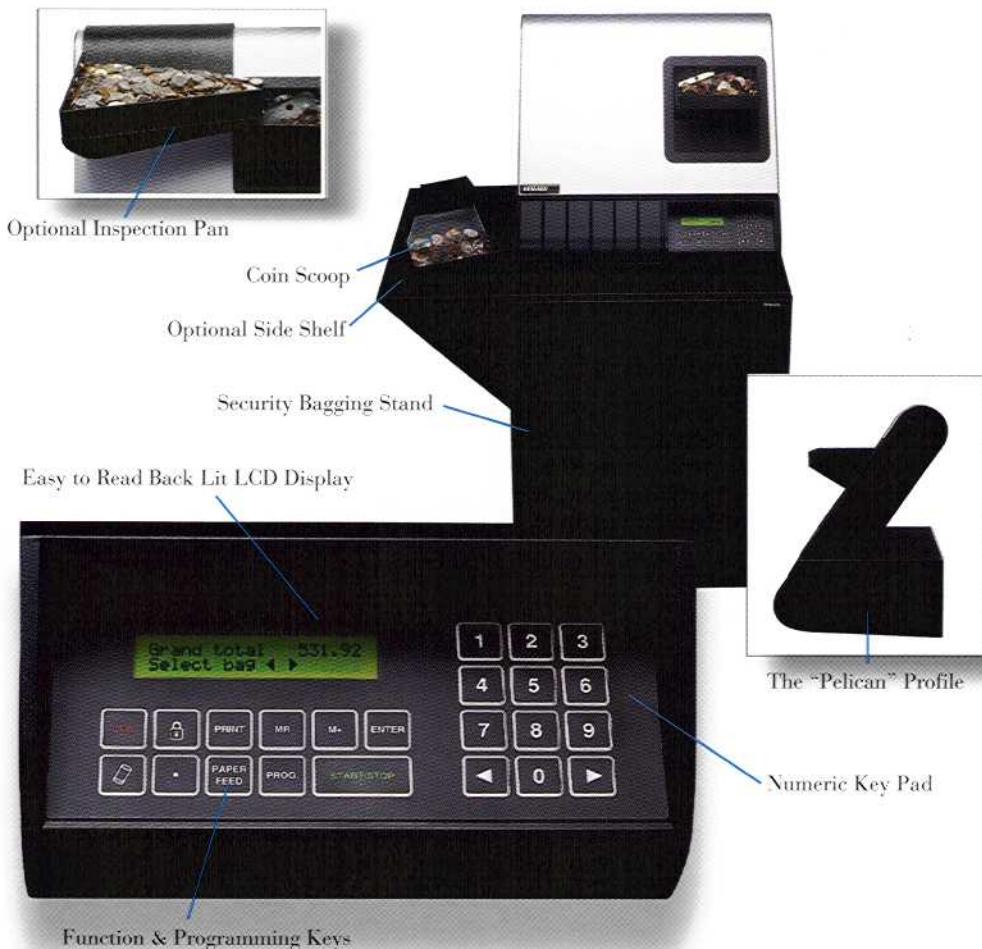

Local Representative:

MAGNER®

Magner Corporation of America, 41 West Street, Middlefield, Connecticut USA 06455
www.magner.com • Tel: (860) 349-1097 • Fax: (860) 349-1257 • E-mail: info@magner.com

Pelican 305

Specifications

Counting Speed:

700 coins/per minute (U.S. dimes)

Display: LCD, 2 lines, 20 characters

Coin Diameter:

.5512 in. to 1.339 in.
(14mm to 34mm)

Coin Thickness:

Max. .1575 in. (4mm)

Inspection Pan Capacity:

Approximately 3000 U.S. dimes

Hopper Capacity:

Approximately 1000 U.S. dimes

Batching:

Programmable exact bag stops

Counting Device: Alloy sensor

Sorting Method: Gravity rail

Dimensions:

20.5 in. (W) x 13.2 in. (D) x 18.7 in. (H)
520mm (W) x 335mm (D) x 475mm (H)

Net Weight: 48.4 lbs. (22 kg.)

Power Source: 110/220 VAC

Consumption Power: 24 V

Temperature Limits:

+41° to +104° F (+5° to +40° C)

Other Standard Features:

- RS232 communications port
- Denomination totals at batch and grand levels
- Coin scoop
- Battery back-up
- Six coin drawers

Optional Additions:

- Inspection pan
- Open bagging stand
- Security bagging stand
- Side shelf for stand (fits left or right)
- Bagging option (manifold and five bag attachments)
- 40 column printer

Specifications are subject to change.

